

2:1 Shrink Ratio, High Temperature, Chemical Resistant PVF2 Tubing



DUNBAR-1675 is semi-rigid, flame retardant, heat shrinkable polyvinylidene fluoride (PVF2) tube for applications requiring outstanding abrasion and cut-through resistance. It reliably protects wires, solder joints, terminals, connections, and components from most industrial fuels, solvents, and chemicals.

STANDARDS:

- SAE AS23053/8 (Formerly AMS-DTL-23053/8) Clear & Black stocked, All colors available.
- Declared Dimensional Life (DDL) – 10 Years
- UL 224: VW-1, 150°C, 600V (File Number: E319303) ☑ RoHS
- REACH Compliant

PRODUCT FEATURES:

- Shrink ratio: 50% or more in the radial direction, 10% or less in the axial direction
- In stock for immediate shipment ☑ Continuous operating temperature: -55°C (-67°F) to 175°C (347°F)
- Flammability: UL VW-1, CSA OFT ☑ Highly heat and abrasion resistant
- High resistance to chemicals and oils

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile Strength	ASTM D638	Min. 5,000 psi
		Elongation		Min. 150%
	Aged	Elongation	ASTM D638	Min. 50%
	Fluid Resist.	Tensile Strength	24°C/24 hrs	Min. 5,000 psi
		Dielectric Strength	6 Fluids	Min. 500 Volts/mil
	Concentricity		ASTM D2671	Min. 70%
	Crystalline Melt Point		ASTM D4951	Min. 150°C
	Heat Shock		300°C/4 hrs	No cracks, flowing, or dripping
	Low Temperature Flexibility		-55°C/4 hrs	No cracking
	Secant Modulus		ASTM D882	Min. 120,000 psi
Specific Gravity		ASTM D792	Max. 1.8	
Electrical	Dielectric Strength		ASTM D2671	Min. 800 Volts/mil (sizes to .5 in.) Min. 600 Volts/mil (sizes over .5 in.)
	Volume Resistivity		ASTM D876	Min. 10 ¹³ Ω · cm
Chemical	Copper Corrosion		175°C/16 hrs	No corrosion
	Fungus Resistance		ASTM G21	No growth
	Water Absorption		ASTM D570	Max. 0.5%
	Flammability		ASTM D2671	Pass


MATRIX PRECISION CONVERTING

Your Application. Our Expertise.

Matrix specializes in precision cutting and converting of engineered materials to meet the exact specifications required by manufacturers. Our state-of-the-art equipment and expertise ensure precise customization, providing manufacturers with streamlined solutions to enhance their product quality and performance.

DUNBAR – 1675 Kynar

2:1 SHRINK RATIO, HIGH TEMPERATURE, CHEMICAL RESISTANT PVF₂ TUBING

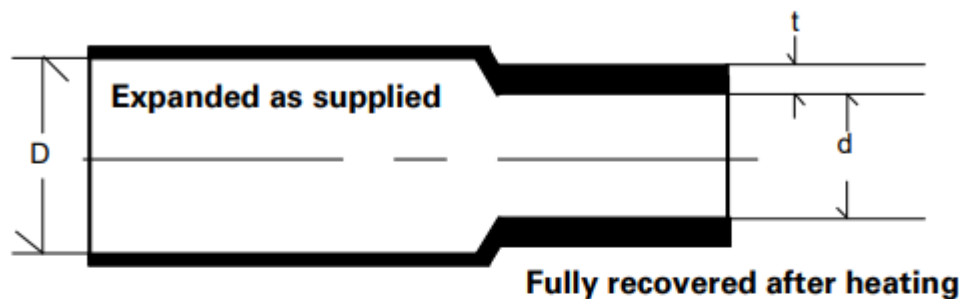

Product Dimensions

Minimum Shrink Temperature: 175°C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (Minimum) (D)		Internal Diameter (Maximum) (d)		Total Wall Thickness (Minimum) (t)		
	In.	mm	In.	mm	In.	mm	ft
3/64"	0.046	1.2	0.023	0.6	0.008	0.2	500
1/16"	0.063	1.6	0.031	0.8	0.008	0.2	500
3/32"	0.093	2.4	0.046	1.2	0.008	0.2	500
1/8"	0.125	3.2	0.062	1.6	0.008	0.2	500
3/16"	0.187	4.7	0.093	2.4	0.008	0.2	250
1/4"	0.250	6.4	0.125	3.2	0.009	0.2	250
3/8"	0.375	9.5	0.187	4.7	0.009	0.2	200
1/2"	0.500	12.7	0.250	6.4	0.009	0.2	200
3/4"	0.750	19.1	0.375	9.5	0.014	0.3	100
1"	1.00	25.4	0.500	12.7	0.016	0.4	100